Global LCD Panel Exchange Center www.panelook.com 屏库:全球液晶屏交易中心

SAMSUNG ELECTRONICS

Approval

LEAD-FREE

TO : HP

DATE : Jan 5. 2011

SAMSUNG TFT-LCD

MODEL NO : LTN156KT02-301

NOTE : Extension code [-301]
→ LTN156KT02-301
Surface type [Anti-Glare]

Any Modification of Spec is not allowed without SEC' permission.

APPROVED BY : James Lee

PREPARED BY : Jay Kim

Technical Customer Support Team, LCD Division
Samsung Electronics Co., Ltd.

wise view™

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

Global LCD Panel Exchange Center www.panelook.com 屏库:全球液晶屏交易中心

Approval

CONTENTS

Revision History ---------- (3)

General Description ---------- (4)

1. Absolute Maximum Ratings ---------- (5)
   1.1 Absolute Ratings of environment
   1.2 Electrical Absolute Ratings

2. Optical Characteristics ---------- (7)

3. Electrical Characteristics ---------- (10)
   3.1 TFT LCD Module
   3.2 Backlight Unit
   3.3 LED Driver

4. Block Diagram ---------- (13)
   4.1 TFT LCD Module

5. Input Terminal Pin Assignment ---------- (15)
   5.1 Input Signal & Power
   5.2 LVDS Interface
   5.3 Timing Diagrams of LVDS For Transmitting
   5.4 Input Signals, Basic Display Colors and Gray Scale of Each Color.
   5.5 Pixel format

6. Interface Timing ---------- (21)
   6.1 Timing Parameters
   6.2 Timing Diagrams of interface Signal
   6.3 Power ON/OFF Sequence

7. Outline Dimension ---------- (23)

8. Packing ---------- (25)

9. Markings & Others ---------- (26)

10. General Precautions ---------- (28)

11. EDID ---------- (30)

www.panelook.com

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

Global LCD Panel Exchange Center www.panelook.com 屏库:全球液晶屏交易中心

REVISION HISTORY

Approval

Date	Revision No.	Page	Summary
Jan 5. 2011	A00	All	The approval specification of LTN156KT02-301 model was issued first

www.panelook.com

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

Global LCD Panel Exchange Center www.panelook.com 屏库:全球液晶屏交易中心

Approval

GENERAL DESCRIPTION

DESCRIPTION

LTN156KT02 is a color active matrix TFT (Thin Film Transistor) liquid crystal display (LCD) that uses amorphous silicon TFT as switching devices. This model is composed of a TFT LCD panel, a driver circuit and a backlight system. The resolution of a 15.6" contains 1600 x 900 pixels and can display up to 262,144 colors. 6 O'clock direction is the Optimum viewing angle.

FEATURES

- 1600 x 900 pixels resolution (16:9)
- Fast Response Time
- Low power consumption
- LED BLU Structure
- DE (Data enable) only mode
- 3.3V LVDS Interface
- On board EDID chip
- RoHS compliance
- PVC free compliance
- BFR free compliance
- As free compliance

APPLICATIONS

- Notebook PC
- If the usage of this product is not for PC application, but for others, please contact SEC

GENERAL INFORMATION

Item	Specification	Unit	Note
Display area	344.232 (H) x 193.536 (V) (15.6”diagonal)	mm	
Driver element	a-Si TFT active matrix		
Display colors	262,144		
Number of pixel	1600 x 900	pixel	16 : 9
Pixel arrangement	RGB vertical stripe		
Pixel pitch	0.215 (H) x 0.215 (V) (TYP.)	mm	
Display Mode	Normally white		
Surface treatment	Haze 25%, Hardness 3H		Anti-Glare

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

Global LCD Panel Exchange Center www.panelook.com 屏库:全球液晶屏交易中心

Approval

Mechanical Information

Item		Min.	Typ.	Max.	Unit	Note
Module size	Horizontal (H)	358.8	359.3	359.8	mm	
	Vertical (V)	209.0	209.5	210.0	mm	
	Depth (D)	-	-	5.8	mm	(1)
Weight		-	-	480	g	

Note (1) Measurement condition of outline dimension
. Equipment : Vernier Calipers
. Push Force : 500g ·f (minimum)

1. ABSOLUTE MAXIMUM RATINGS

1.1 ENVIRONMENTAL ABSOLUTE RATINGS

Item	Symbol	Min.	Max.	Unit	Note
Storage temperate	TSTG	-20	60	°C	(1)
Operating temperate (Temperature of glass surface)	TOPR	0	50	°C	(1)
Shock (non-operating)	Snop	-	240	G	(2),(4)
Vibration (non-operating)	Vnop	-	2.41	G	(3),(4)

Note (1) Temperature and relative humidity range are shown in the figure below.
95 % RH Max. (40 °C ≥ Ta)
Maximum wet - bulb temperature at 39 °C or less. (Ta > 40 °C) No condensation

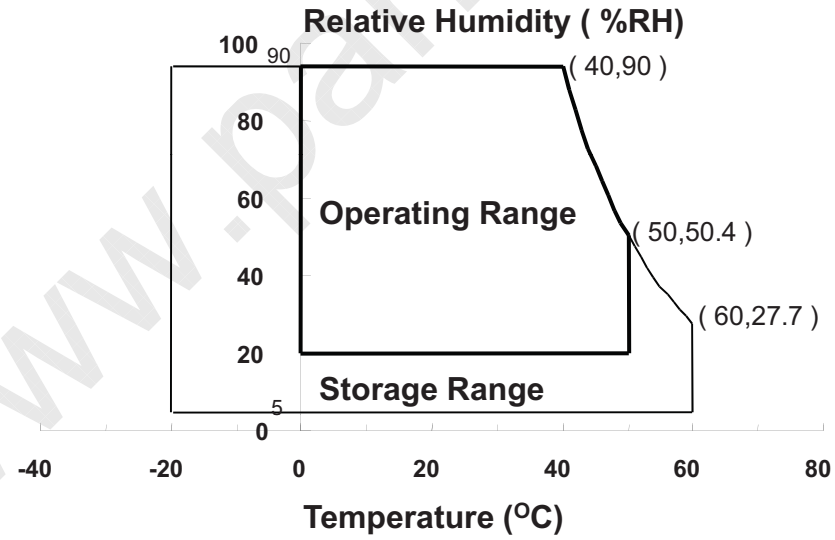

(2) 2ms, half sine wave, one time for ±X, ±Y, ± Z.
(3) 5 - 500 Hz, random vibration, 30min for X, Y, Z.
(4) At testing Vibration and Shock, the fixture in holding the Module to be tested have to be hard and rigid enough so that the Module would not be twisted or bent by the fixture.

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

Global LCD Panel Exchange Center www.panelook.com 屏库:全球液晶屏交易中心

Approval

1.2 ELECTRICAL ABSOLUTE RATINGS

(1) TFT LCD MODULE

V_{DD} =3.3V, V_{SS} = GND = 0V

Item	Symbol	Min.	Max.	Unit	Note
Power Supply Voltage	V_{DD}	V_{DD} – 0.3	V_{DD} + 0.3	V	(1)
Logic Input Voltage	V_{DD}	V_{DD} – 0.3	V_{DD} + 0.3	V	(1)

Note (1) Within Ta (25 ± 2 °C)

www.panelook.com

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

Global LCD Panel Exchange Center www.panelook.com 屏库:全球液晶屏交易中心

Approval

2. OPTICAL CHARACTERISTICS

The following items are measured under stable conditions. The optical characteristics should be measured in a dark room or equivalent state with the methods shown in Note (5). Measuring equipment : TOPCON SR-3

* Ta = 25 ± 2 °C, V_{DD}=3.3V, fv= 60Hz, f_{DCLK} = 53.9 MHz, I_L = 19 mA

Item		Symbol	Condition	Min.	Typ.	Max	Unit	Note
Contrast Ratio (5 Points)		CR	Normal Viewing Angle $\phi = 0$ $\theta = 0$	400	-	-	-	(1), (2), (5)
Response Time at Ta (Rising + Falling)		T_{RT}		-	16	25	msec	(1), (3)
Average Luminance of White (5 Points)		$Y_{L,AVE}$		170	200	-	cd/m^2	I_L=19mA (1), (4)
Color Chromaticity (CIE)	Red	R_X		0.594	0.624	0.654	-	
		R_Y		0.310	0.340	0.370		
	Green	G_X		0.297	0.327	0.357		
		G_Y		0.548	0.578	0.608		
	Blue	B_X		0.124	0.154	0.184		
		B_Y		0.030	0.060	0.090		
	White	W_X		0.283	0.313	0.343		
		W_Y		0.299	0.329	0.359		
Viewing Angle	Hor.	θ_L	CR ≥ 10	60	-	-	Degrees	(1), (5) SR-3
		θ_R		60	-	-		
	Ver.	ϕ_H		50	-	-		
		ϕ_L		50	-	-		
Color Gamut				-	60	-	%	
13 Points White Variation		δ_L		-	-	1.6	-	(6)

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

Approval

Note 1) Definition of Viewing Angle : Viewing angle range(10 ≤ C/R)

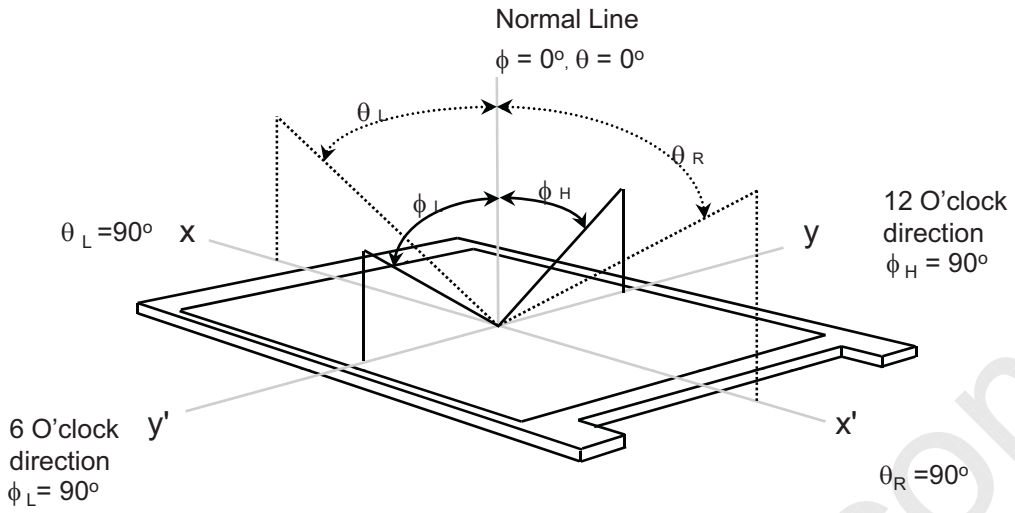

Note 2) Definition of Contrast Ratio (CR) : Ratio of gray max (Gmax) ,gray min (Gmin) at 5 points (33, 55, 77, 37, 73)

$$CR = \frac{CR(33) + CR(55) + CR(77) + CR(37) + CR(73)}{5}$$

Points : 33, 55, 77, 37, 73 at the figure of Note (6).

Note 3) Definition of Response time :

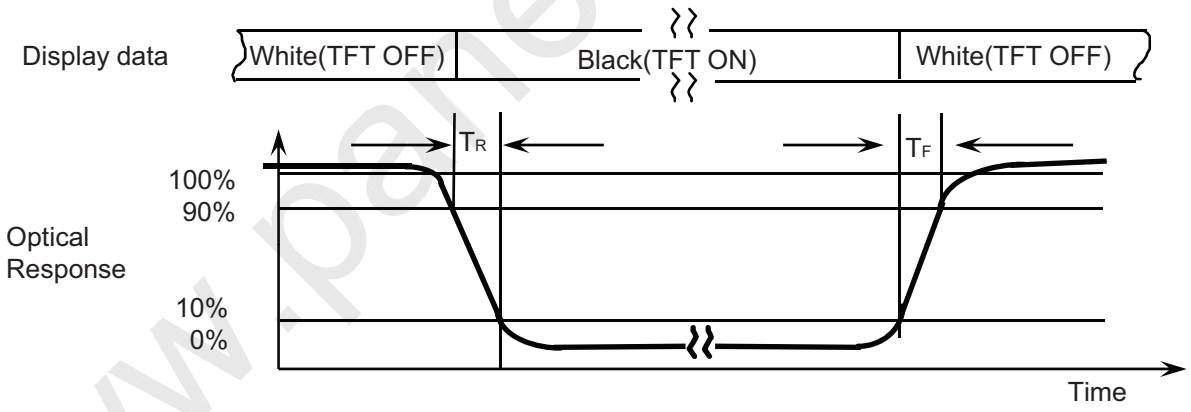

Note 4) Definition of Average Luminance of White : measure the luminance of white at 5 points.

Average Luminance of White ($Y_{L,AVE}$)

$$Y_{L,AVE} = \frac{Y_{L33} + Y_{L55} + Y_{L77} + Y_{L37} + Y_{L73}}{5}$$

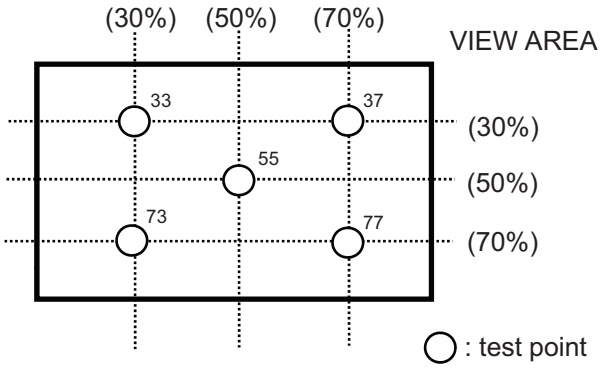

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

Approval

Note 5) After stabilizing and leaving the panel alone at a given temperature for 30 min , the measurement should be executed. Measurement should be executed in a stable, windless,and dark room.
30 min after lighting the backlight. This should be measured in the center of screen.
LED current : 19 mA
Environment condition : Ta = 25 ± 2 °C

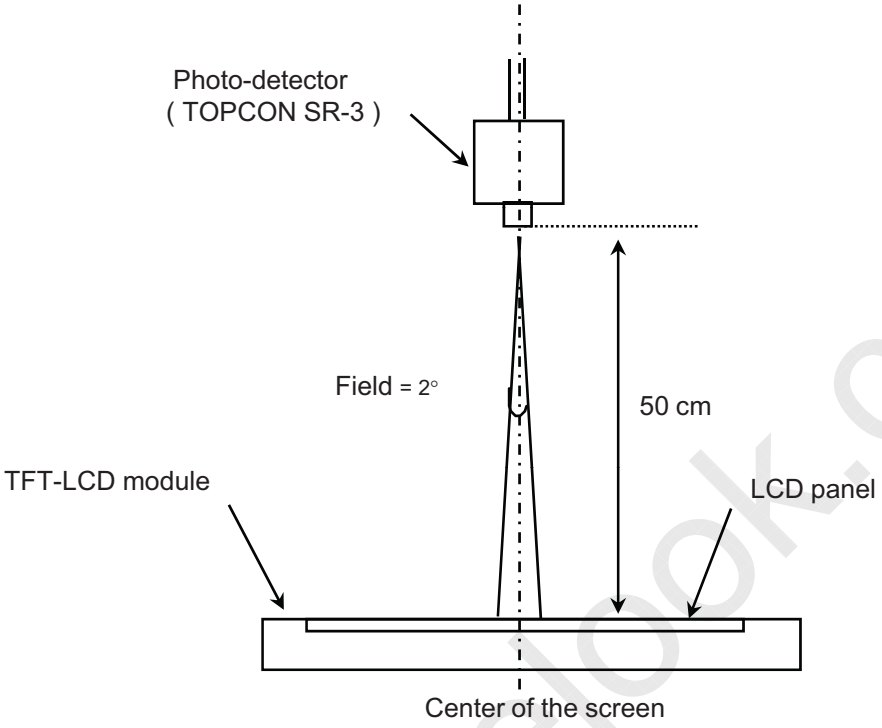

[Optical characteristics measurement setup]

Note 6) Definition of 13 points white variation (δ_L), CR variation(C_{VER}) [◯ ~ ◯]

$$\frac{\text{Maximum luminance of 13 points}}{\text{Minimum luminance of 13 points}}$$

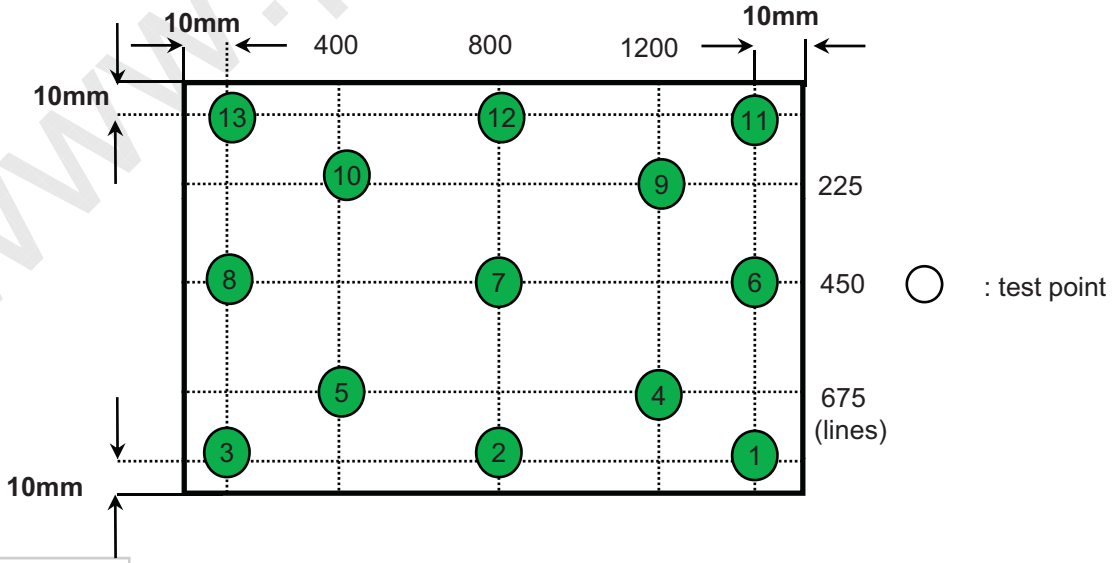

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

3. ELECTRICAL CHARACTERISTICS

Approval

3.1 TFT LCD MODULE

Ta= 25 ± 2°C

Item		Symbol	Min.	Typ.	Max.	Unit	Note
Voltage of Power Supply		V_{DD}	3.0	3.3	3.6	V	
Differential Input Voltage for LVDS Receiver Threshold	High	V_{IH}	-	-	+100	mV	V_{CM} = +1.2V
	Low	V_{IL}	-100	-	-	mV	
Vsync Frequency		fv	-	60	-	Hz	
Hsync Frequency		f_H	-	55.8	-	KHz	
Main Frequency		f_{DCLK}	-	53.9	-	MHz	
Rush Current		I_{RUSH}	-	-	1.5	A	(4)
Current of Power Supply	White	I_{DD}	-	430	-	mA	(2),(3)*a
	Mosaic		-	470	515	mA	(2),(3)*b
	V. Stripe		-	570	615	mA	(2),(3)*c

Note (1) Display data pins and timing signal pins should be connected.(GND = 0V)

(2) f_V = 60Hz, f_{DCLK} = 53.9 MHZ, V_{DD} = 3.3V , DC Current.

(3) Power dissipation pattern

*a) White Pattern

*b) Mosaic Pattern

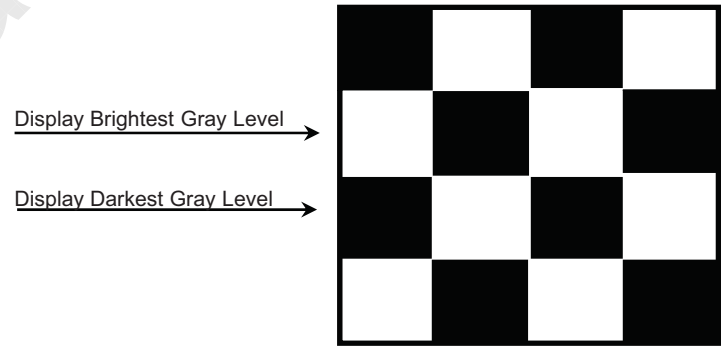

www.panelook.com

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

Approval

*c) 1dot Vertical stripe pattern

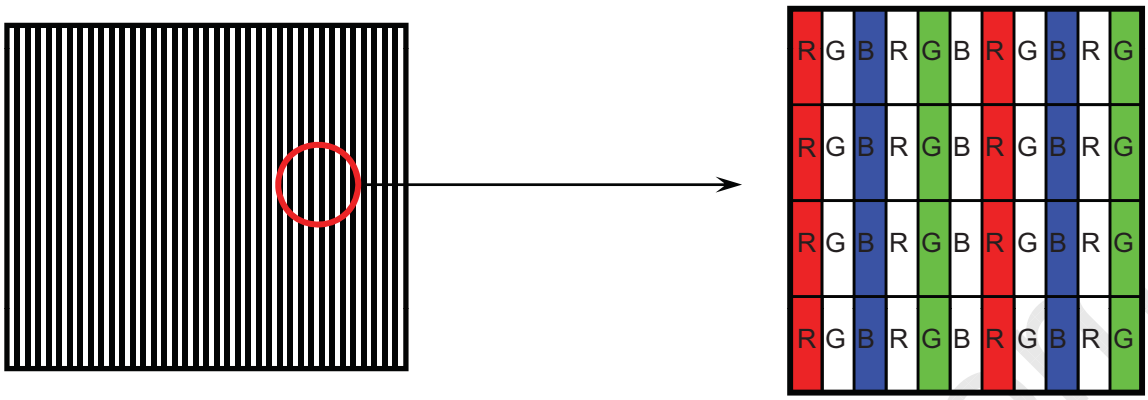

4) Rush current measurement condition

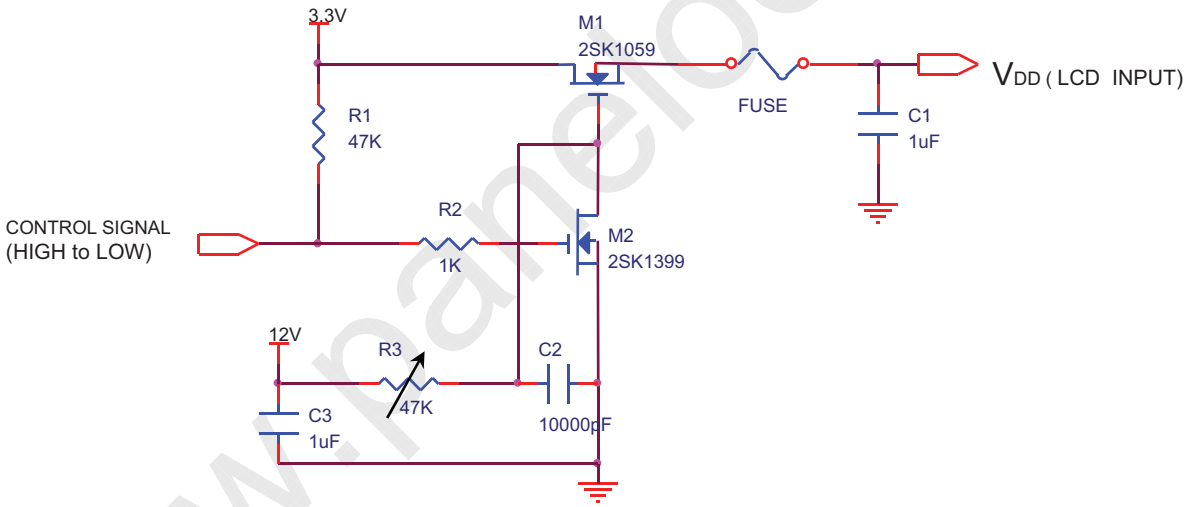

VDD rising time is 470us

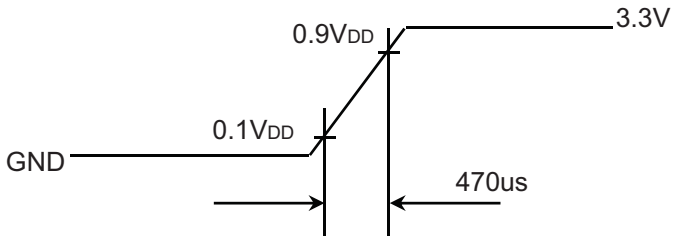

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

Approval

3.2 BACK-LIGHT UNIT

Ta= 25 ± 2 °C

Item	Symbol	Min.	Typ.	Max.	Unit	Note
LED Forward Current	IF	-	20	-	mA	
LED Forward Voltage	VF	-	3.2	-	V	
LED Array Voltage	VP	-	25.6	-	V	VF X 8 LEDs
Power Consumption	P	-	-	5.3	W	

3.3 LED Driver

- On board LED Driver (Manufacturer : Richtek)

Ta= 25 ± 2 °C

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Input Voltage	V_{in}	6	12	20	V	
Enable Control Level	V	0	-	5	V	ON Level : 2.5V~5V OFF Level : 0V ~ 0.5V
PWM Control Level	V_{PWM}	0		5	V	High Level : 2.7V~5V Low Level : 0V ~ 0.3V
PWM Control Duty Ratio	%	10	-	100	%	
PWM Input Frequency	BLIM	0.2	-	1	KHz	

Note - Test Equipment : Fluke 45

www.panelook.com

Samsung Secret

Approval

4. BLOCK DIAGRAM

4.1 TFT LCD Module

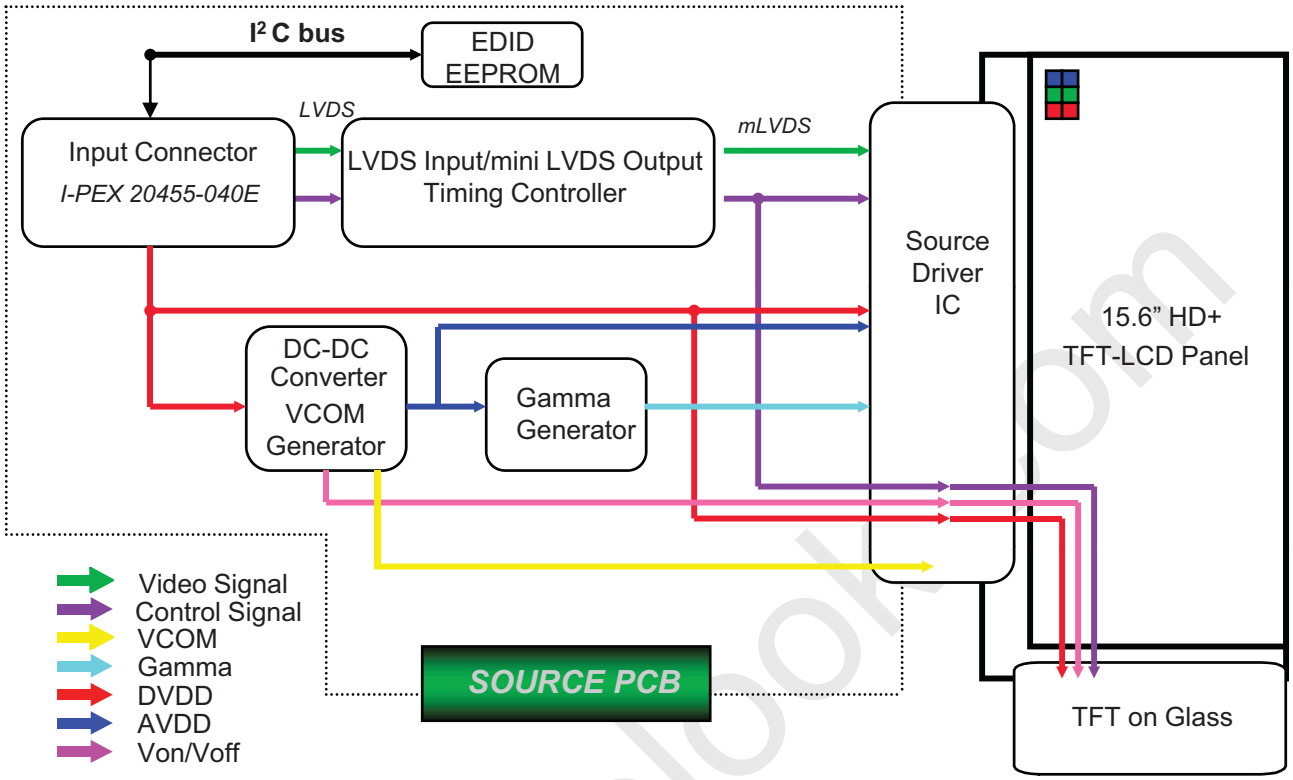

www.panelook.com

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

Approval

4. BLOCK DIAGRAM

4.2 LED connection and placement

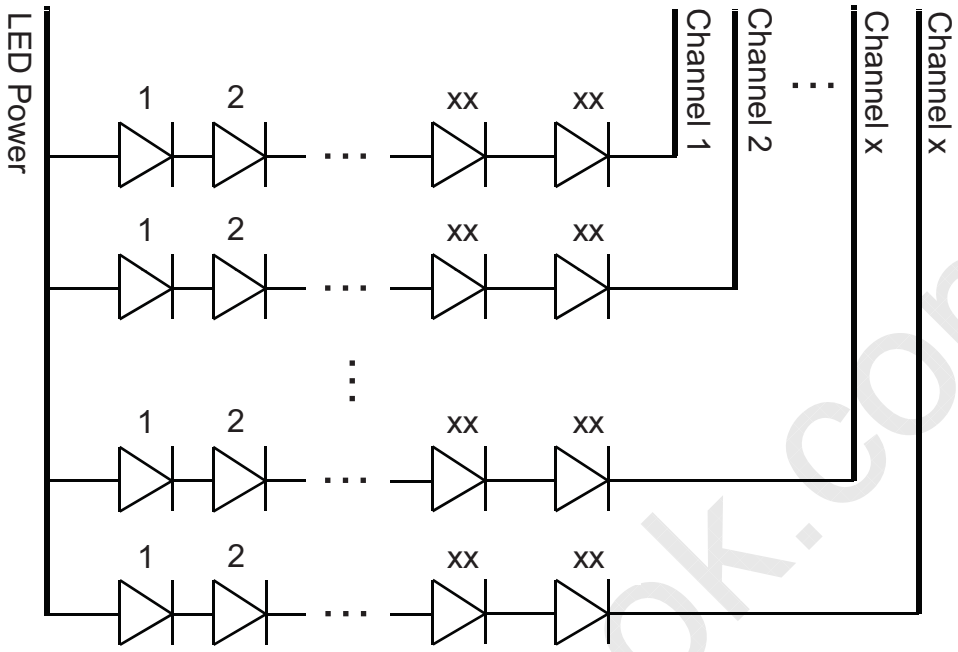

LED Wiring

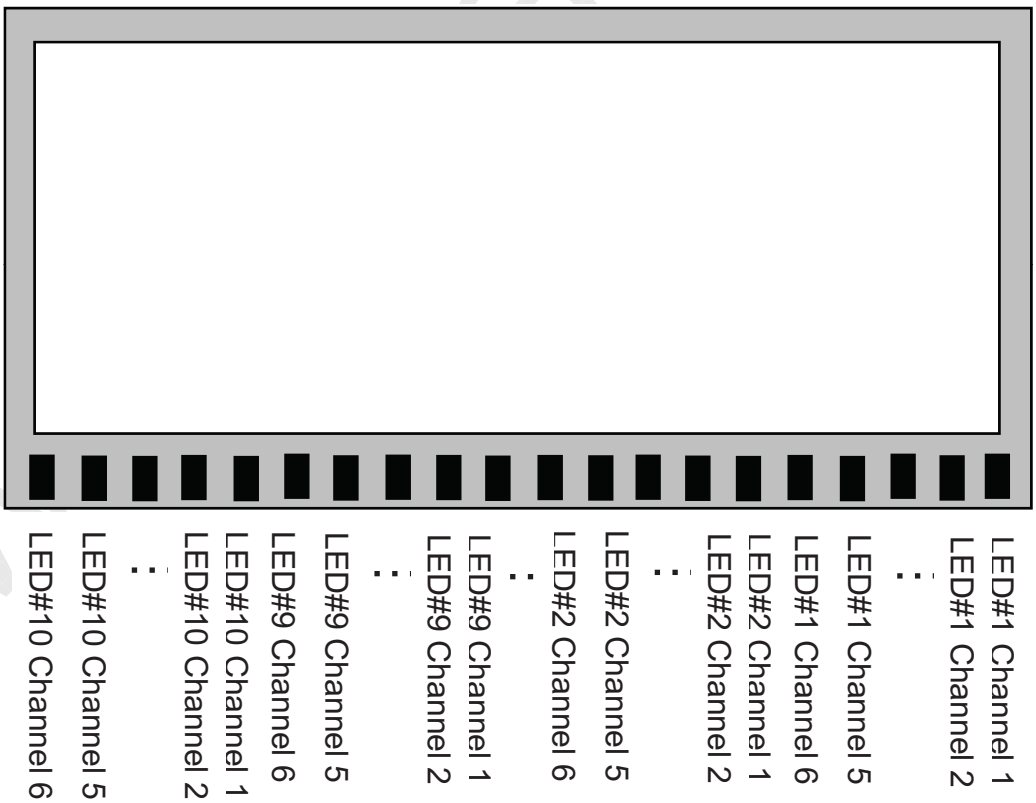

LED Placement

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

Global LCD Panel Exchange Center www.panelook.com 屏库:全球液晶屏交易中心

Approval

5. INPUT TERMINAL PIN ASSIGNMENT

5.1. Input Signal & Power (LVDS, Connector : 20455-040E-0 by I-PEX or equivalent)

No.	Signal	Description
1	NC	No Connection
2	AVDD	Power Supply, 3.3V (typical)
3	AVDD	Power Supply, 3.3V (typical)
4	DVDD	DDC 3.3V power
5	NC	No Connection
6	SCL	DDC Clock
7	SDA	DDC Data
8	Rin0-	-LVDS differential data input (R0-R5, G0)
9	Rin0+	+LVDS differential data input (R0-R5, G0)
10	GND	Ground
11	Rin1-	-LVDS differential data input (G1-G5, B0-B1)
12	Rin1+	+LVDS differential data input (G1-G5, B0-B1)
13	GND	Ground
14	Rin2-	-LVDS differential data input (B2-B5, HS, VS, DE)
15	Rin2+	+LVDS differential data input (B2-B5, HS, VS, DE)
16	GND	Ground
17	ClkIN-	-LVDS differential clock input
18	ClkIN+	+LVDS differential clock input
19	GND	Ground
20	NC	No Connection
21	NC	No Connection
22	GND	Ground
23	NC	No Connection
24	NC	No Connection
25	GND	Ground

www.panelook.com

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

Approval

5.1. Input Signal & Power (LVDS, Connector : 20455-040E-0 by I-PEX or equivalent)

No.	Signal	Description
26	NC	No Connection
27	NC	No Connection
28	GND	Ground
29	NC	No Connection
30	NC	No Connection
31	VBL-	LED Ground
32	VBL-	LED Ground
33	VBL-	LED Ground
34	NC	No Connection
35	BLIM	PWM for luminance control (200~1KHz, 3.3V, 10~100%)
36	BL_Enable	BL On/Off (On:2.0~3.3V, Off: 0~0.5V)
37	NC	No Connection
38	VBL+	LED Power Supply 6V~20V
39	VBL+	LED Power Supply 6V~20V
40	VBL+	LED Power Supply 6V~20V

www.panelook.com

Samsung Secret

Approval

5.2 LVDS Interface : Transmitter DS90CF363 or Compatible

Pin No.	Name	RGB Signal	Pin No.	Name	RGB Signal
51	TxIN0	R0	14	TxIN14	G5
52	TxIN1	R1	15	TxIN15	B0
54	TxIN2	R2	19	TxIN18	B1
55	TxIN3	R3	20	TxIN19	B2
56	TxIN4	R4	22	TxIN20	B3
3	TxIN6	R5	23	TxIN21	B4
4	TxIN7	G0	24	TxIN22	B5
6	TxIN8	G1	27	TxIN24	Hsync
7	TxIN9	G2	28	TxIN25	Vsync
11	TxIN12	G3	30	TxIN26	DE
12	TxIN13	G4	31	TxCLKIN	Clock

LVDS INTERFACE

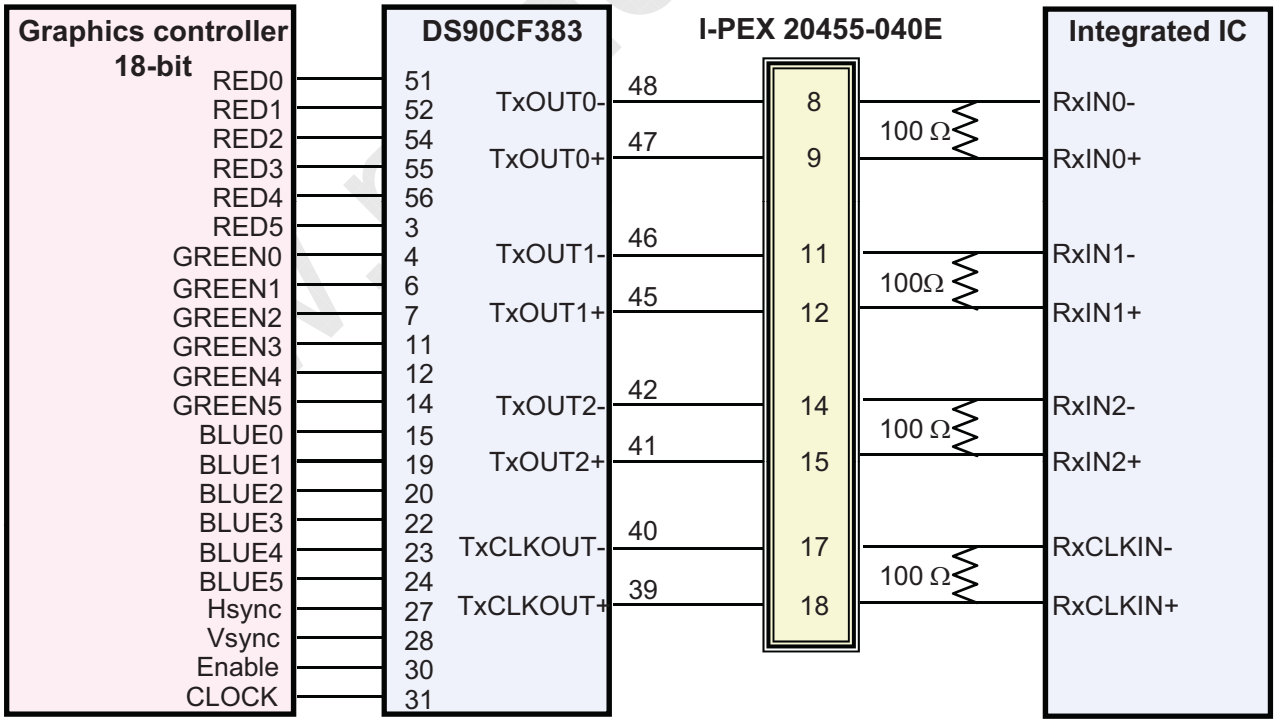

Note : The LCD Module uses a 100ohm resistor between positive and negative lines of each receiver input.

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

Global LCD Panel Exchange Center www.panelook.com 屏库:全球液晶屏交易中心

Approval

5.3 Timing Diagrams of LVDS For Transmission

LVDS Receiver : Integrated T-CON

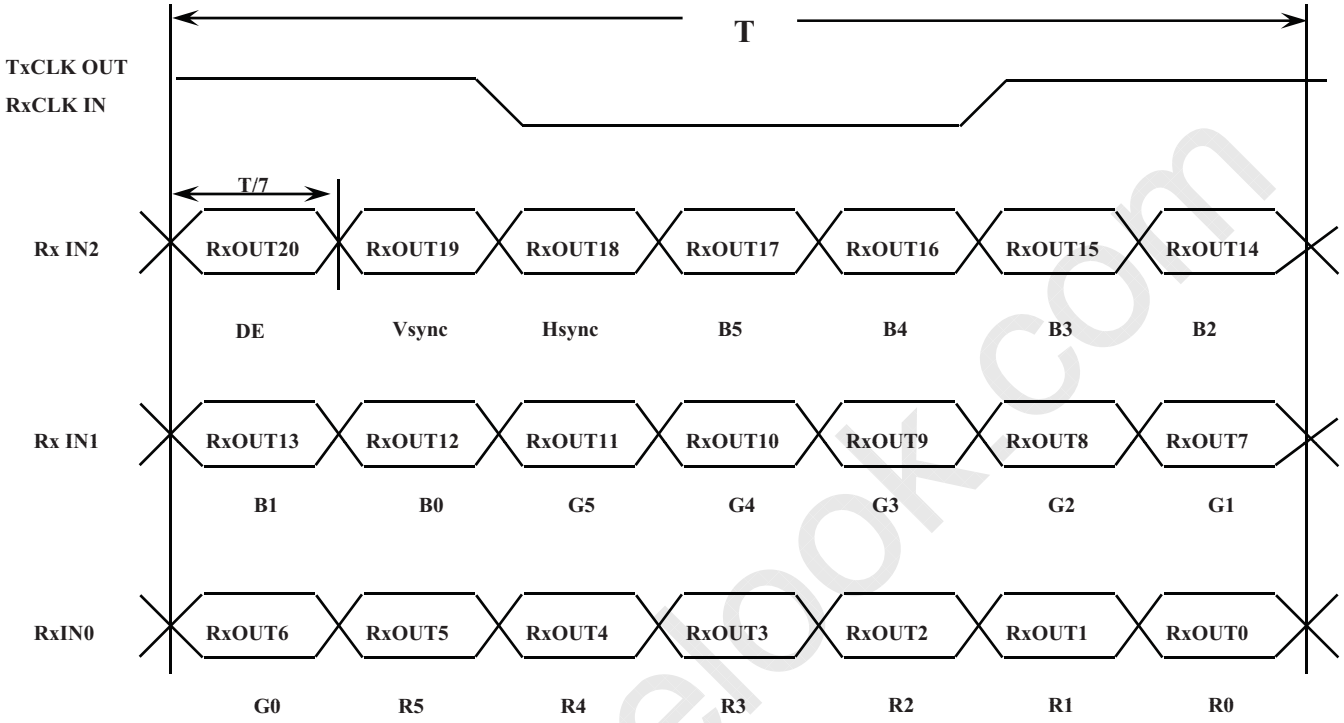

www.panelook.com

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

Approval

5.4 Input Signals, Basic Display Colors and Gray Scale of Each Color

Color	Display	Data Signal																		Gray Scale Level
		Red						Green						Blue						
		R0	R1	R2	R3	R4	R5	G0	G1	G2	G3	G4	G5	B0	B1	B2	B3	45	B5	
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	-
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0	-
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	-
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	-
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1	-
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	-
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-
Gray Scale Of Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R0
	Dark	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1
	↑	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R2
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	R3~R60
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	↓	1	0	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	R61
	Light	0	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	R62
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	R63
Gray Scale Of Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G0
	Dark	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	G1
	↑	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	G2
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	G3~G60
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	↓	0	0	0	0	0	0	1	0	1	1	1	1	0	0	0	0	0	0	G61
	Light	0	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	G62
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0	G63
Gray Scale Of Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B0
	Dark	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	B1
	↑	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	B2
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	B3~B60
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	↓	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	B61
	Light	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	B62
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	B63

Note 1) Definition of gray :
Rn: Red gray, Gn: Green gray, Bn: Blue gray (n=gray level)
Note 2)Input signal: 0 =Low level voltage, 1=High level voltage

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

Global LCD Panel Exchange Center www.panelook.com 屏库:全球液晶屏交易中心

Approval

5.5 Pixel Format in the display

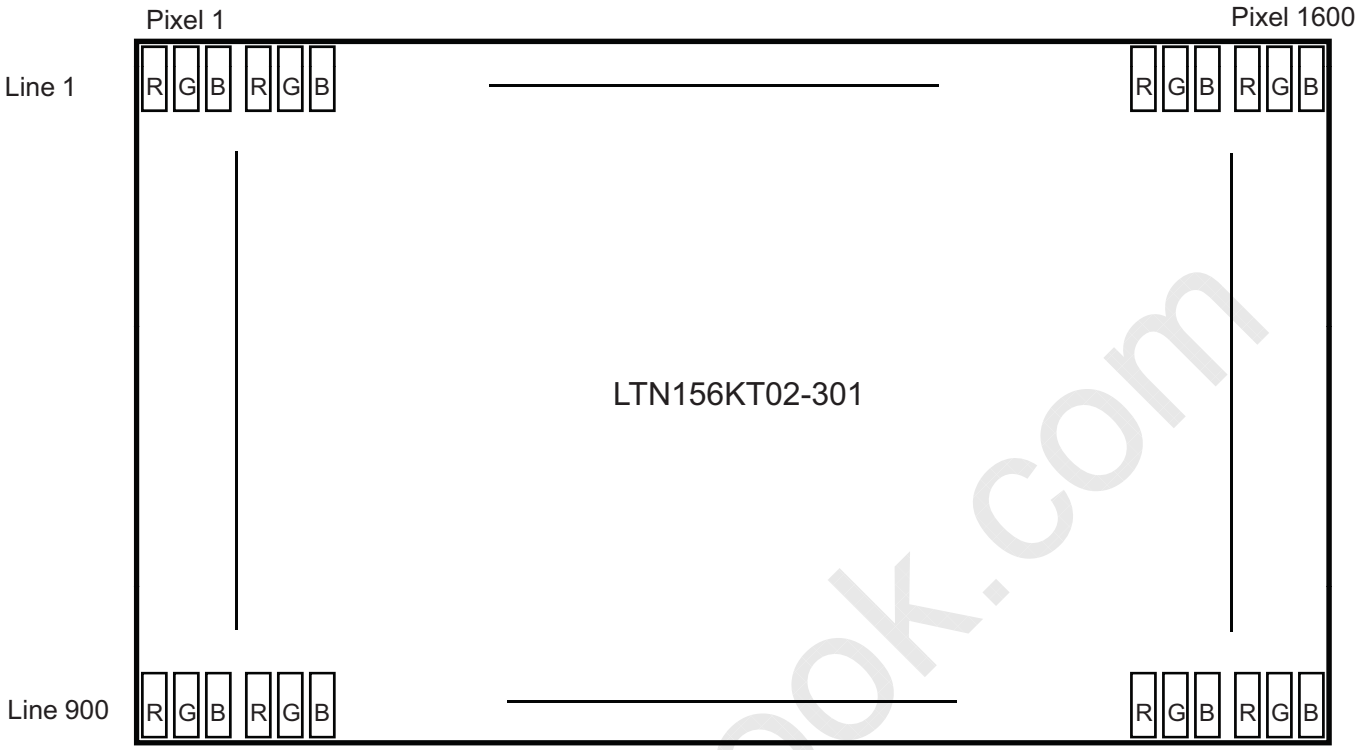

www.panelook.com

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

Approval

6. INTERFACE TIMING

6.1 Timing Parameters

Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
Frame Frequency	Cycle	TV	912	930	1140	Lines	-
Vertical Active Display Term	Display Period	TVD	-	900	-	Lines	-
One Line Scanning Time	Cycle	TH	846	966	1050	Clocks	-
Horizontal Active Display Term	Display Period	THD	-	800	-	Clocks	-

6.2 Timing diagrams of interface signal

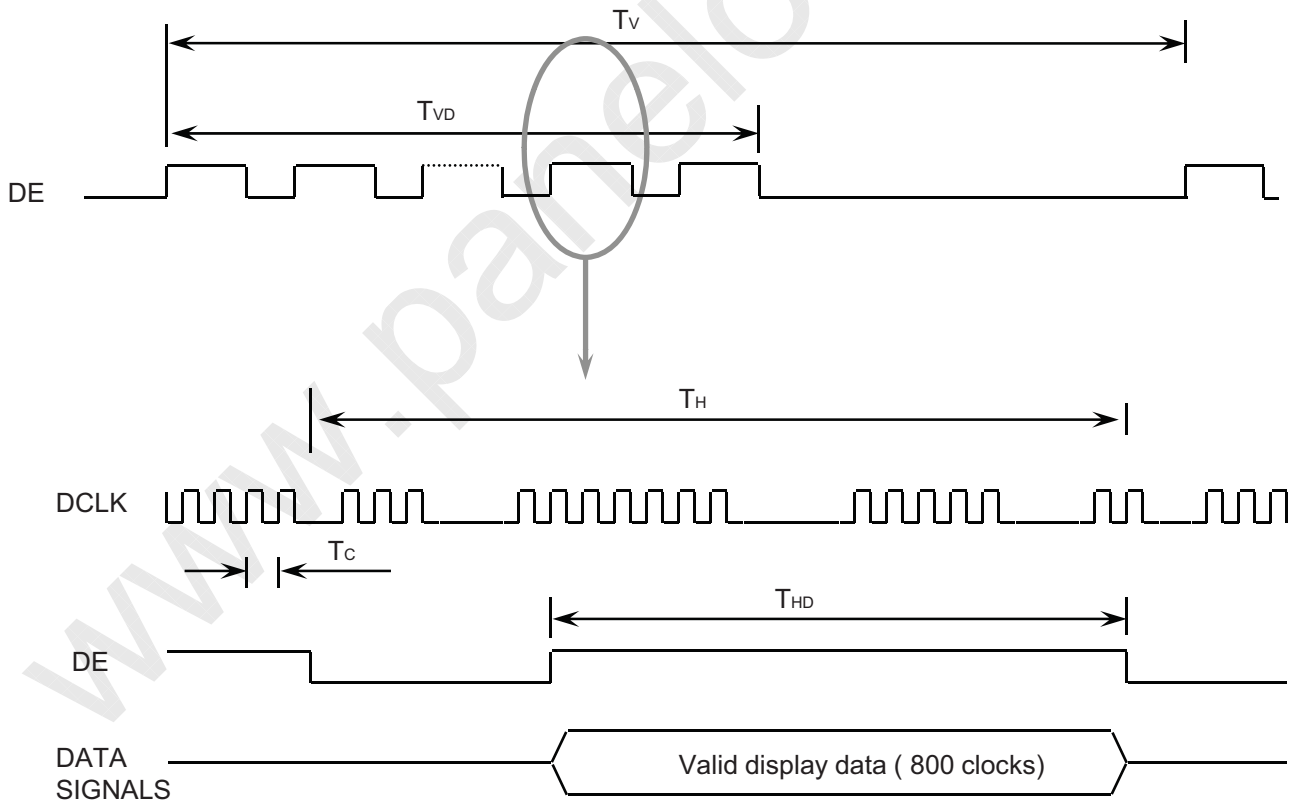

www.panelook.com

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

6.3 Power ON/OFF Sequence

Approval

: To prevent a latch-up or DC operation of the LCD module, the power on/off sequence should be as the diagram below.

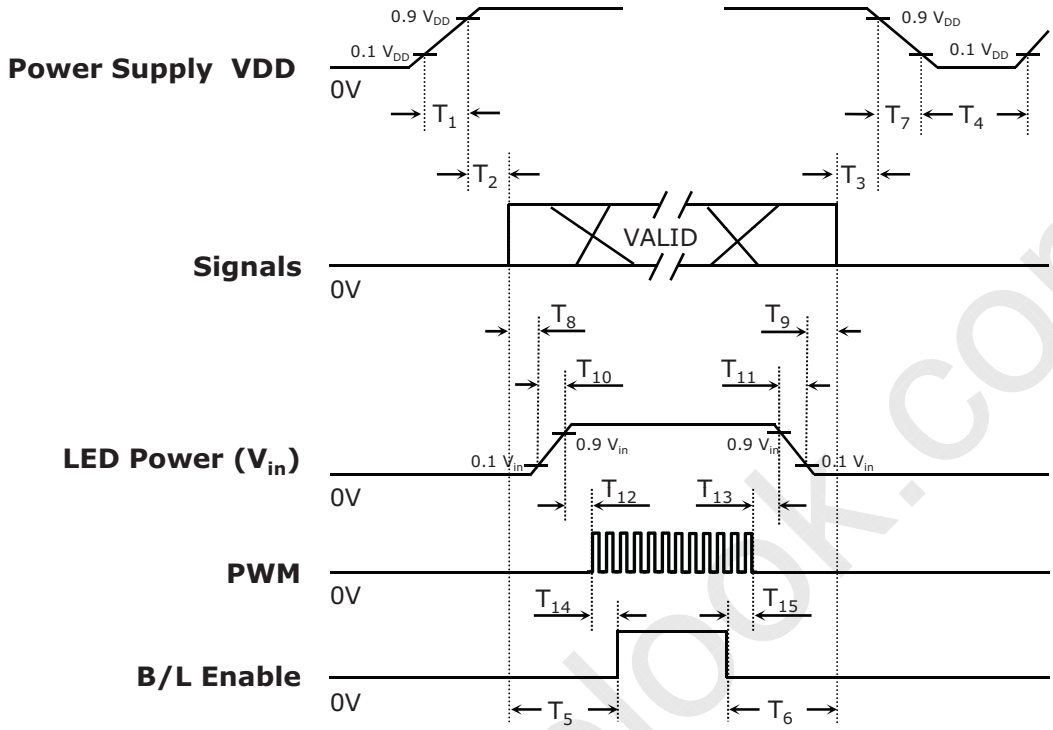

Timing (ms)	Remarks
$0.5 < T_1 \leq 10$	V_{DD} rising time from 10% to 90%
$0 < T_2 \leq 50$	Delay from V_{DD} to valid data at power ON
$0 < T_3 \leq 50$	Delay from valid data OFF to V_{DD} OFF at power Off
$500 \leq T_4$	V_{DD} OFF time for Windows restart
$200 \leq T_5$	Delay from valid data to B/L enable at power ON
$200 \leq T_6$	Delay from valid data off to B/L disable at power Off
$0 < T_7 \leq 10$	V_{DD} falling time from 90% to 10%
$10 < T_8$	Delay from valid data on to LED driver Vin rising time 10%
$10 < T_9$	Delay from LED driver Vin falling time 10% to valid data Off
$0.5 < T_{10} \leq 10$	LED V_{in} rising time from 10% to 90%
$0.5 < T_{11} \leq 10$	LED V_{in} falling time from 90% to 10%
$10 < T_{12}$	Delay from LED driver Vin rising time 90% to PWM ON
$10 < T_{13}$	Delay from PWM Off to LED driver Vin falling time 10%
$10 < T_{14}$	Delay from PWM ON to B/L Enable ON
$10 < T_{15}$	Delay from B/L Enable Off to PWM Off

Note : Backlight may flash if interface signal remains floating state at invalid period.

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

Global LCD Panel Exchange Center www.panelook.com 屏库:全球液晶屏交易中心

7. MECHANICAL OUTLINE DIMENSION

Approval

Refer to the next page

www.panelook.com

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

Global LCD Panel Exchange Center www.panelook.com 屏库:全球液晶屏交易中心

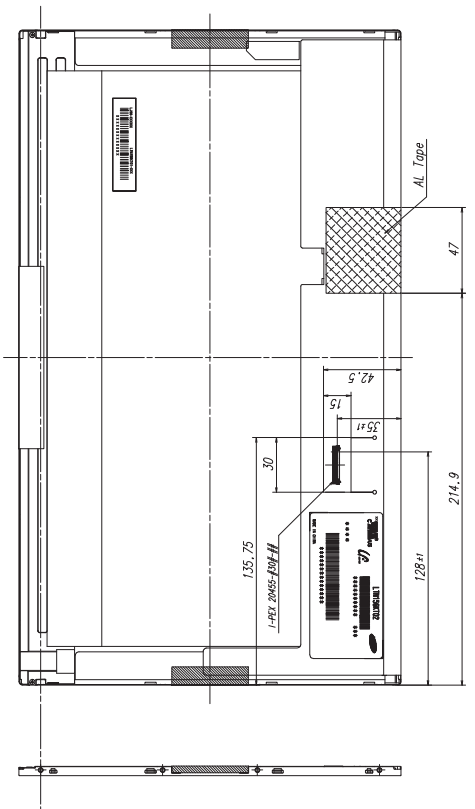

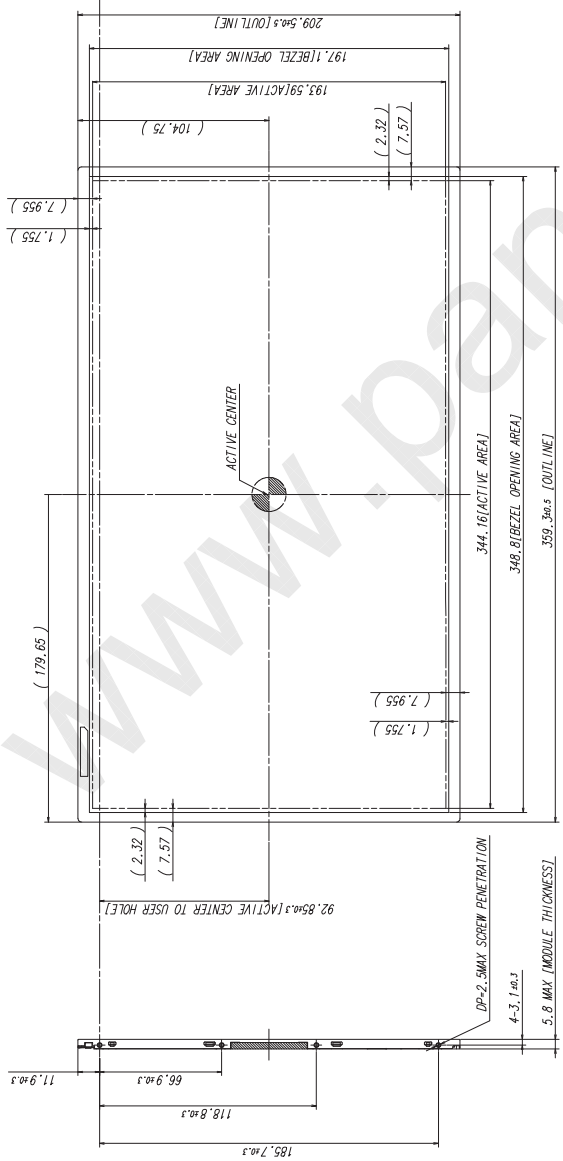

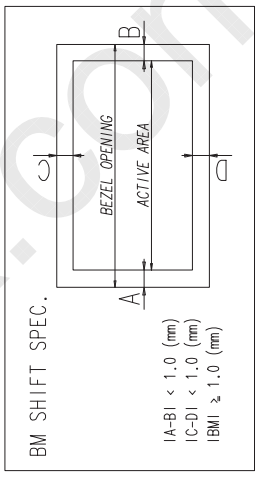

* NOTE
1. SIGNAL INTERFACE CONNECTOR TO BE SPECIFIED AS BELOW.
   -. MAKER : I-PEX OR COMPATIBLE
   -. INPUT CONNECTOR : I-PEX 20455-#30F-## OR EQUIVALENT
2. LED CONNECTOR FOR BACKLIGHT TO BE SPECIFIED AS BELOW.
   -. MAKER : UUU Electronics
   -. PART NO : 51441-1041
3. CALIFERS MEASURING FORCE : 750 ± 250 gfcm
4. MAXIMUM SCREW TORQUE : MAX 2.5 Kgf-cm(STIMES)
5. WEIGHT : 480 g MAX
6. IN ORDER TO AVOID IC DAMAGE, IT IS NOT ALLOW THAT OVERLAPPING OF CABLES OR ANTENNAS, CAMERA, WLAN, WWAN, OVER THESE COF LOCATIONS.

Preliminary Version REV.001
156HD+ / 5.8MAX



<USER HOLE SCREW HOLE DEPTH>

SAMSUNG ELECTRONICS
LTN156KT02-001
OUTLINE DIMENSION
SHEET 1/1
VER. 000

www.panelook.com
07011703
One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com
이권 07011703 개발1그룹(LCD)129250110 20100601110546
233011275337620

8. PACKING

Approval

1. CARTON(Internal Package)

(1) Packing Form
Corrugated Cardboard box and Corrupad form as shock absorber

(2) Packing Method

CUSHION BOTTOM

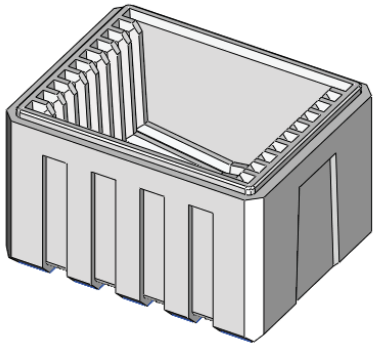

PANEL : 2EA/SLIT



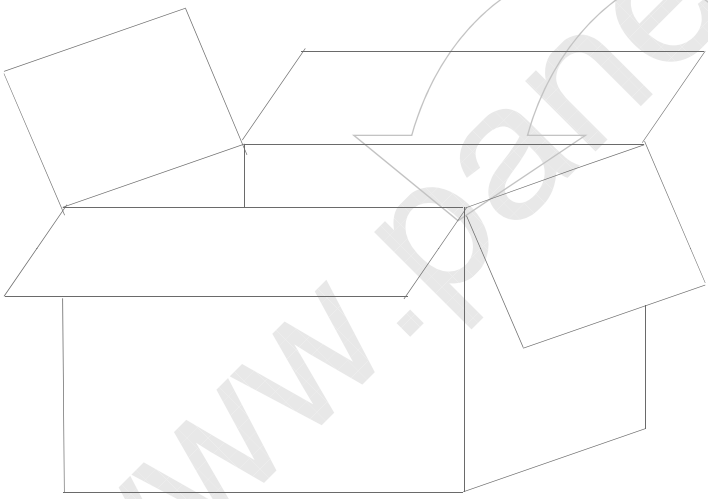

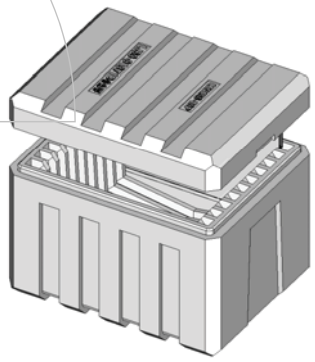

CUSHION TOP, BOTTOM

Note (1) Total : Approx. 12400 g

(2) Acceptance number of piling : 20 sets

(3) Carton size : 359(W) X 463(D) X 333(H)

(4) MAX accumulation quantity : 5 cartons

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

Approval

No	Part name	Quantity
1	Static electric protective sack	20
2	Packing case (Inner box) included shock absorber	1 set
3	Pictorial marking	2 pcs
4	Carton	1 set

9. MARKINGS & OTHERS

A nameplate bearing followed by is affixed to a shipped product at the specified location on each product.

(1)Parts number : LTN156KT02
(2)Revision code : 3 letters
(3)Lot number : X X X X XXX XX X **301**

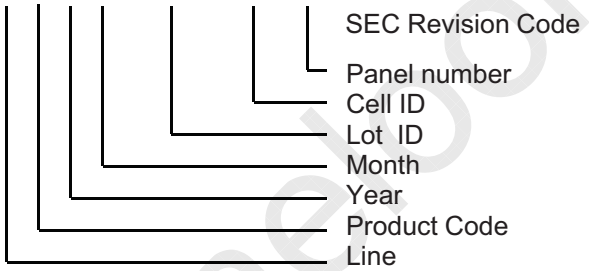

(4) Nameplate Indication

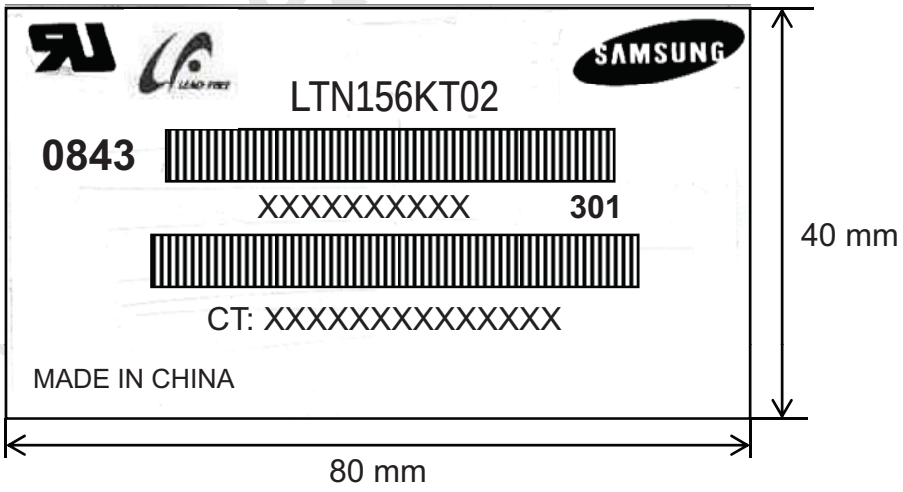

Parts name : LTN156KT02
Lot number : XXXXXXXXXX
Inspected work week : 1043 (2010 year 43rd week)
Product Revision Code : **301**
CT code : XXXXXXXXXXXXX (Released after HP's approval)

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

Approval

(5) High voltage caution notice

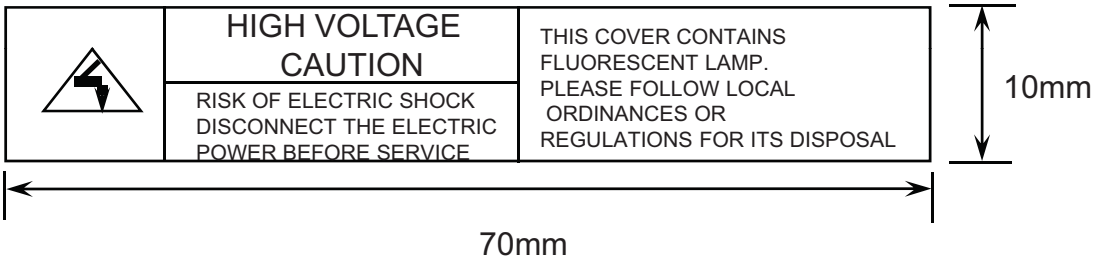

(6) Packing small box attach

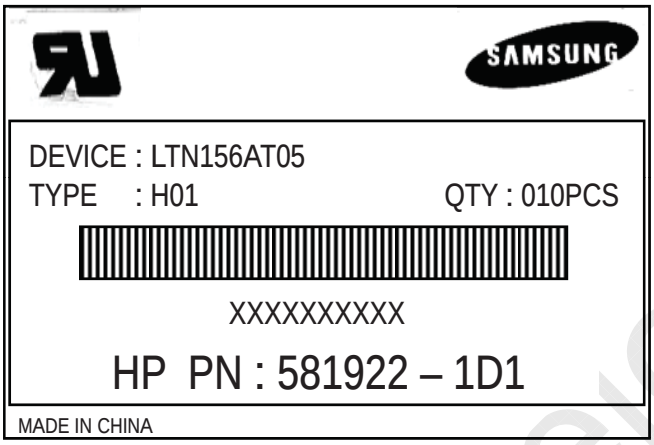

www.panelook.com

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

Global LCD Panel Exchange Center www.panelook.com 屏库:全球液晶屏交易中心

10. GENERAL PRECAUTIONS

Approval

1. Handling

(a) When the module is assembled, It should be attached to the system firmly using every mounting holes. Be careful not to twist and bend the modules.

(b) Refrain from strong mechanical shock and / or any force to the module. In addition to damage, this may cause improper operation or damage to the module.

(c) Note that polarizers are very fragile and could be easily damaged. Do not press or scratch the surface harder than a HB pencil lead.

(d) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, Staining and discoloration may occur.

(e) If the surface of the polarizer is dirty, clean it using some absorbent cotton or soft cloth.

(f) The desirable cleaners are water, IPA (Isoprophyl Alcohol) or Hexane.
Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.

(g) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth . In case of contact with hands, legs or clothes, it must be washed away thoroughly with soap.

(h) Protect the module from static , it may cause damage to the C-MOS Gate Array IC.

(i) Use fingerstalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.

(j) Do not disassemble the module.

(k) Do not pull or fold the lamp wire.

(l) Do not adjust the variable resistor which is located on the back side.

(m) Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.

(n) Pins of I/F connector shall not be touched directly with bare hands.

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

2. STORAGE

(a) Do not leave the module in high temperature, and high humidity for a long time. It is highly recommended to store the module with temperature from 5 to 40 °C and relative humidity of less than 70%.

(b) Do not store the TFT-LCD module in direct sunlight.

(c) The module shall be stored in a dark place. It is prohibited to apply sunlight or fluorescent light during the store.

(d) Storage period is recommended not to exceed 1 year.

3. OPERATION

(a) Do not connect,disconnect the module in the " Power On" condition.

(b) Power supply should always be turned on/off by following item 6.3 " Power on/off sequence ".

(c) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.

(d) The standard limited warranty is only applicable when the module is used for general notebook applications. If used for purposes other than as specified, SEC is not to be held reliable for the defective operations. It is strongly recommended to contact SEC to find out fitness for a particular purpose.

4. OTHERS

(a) Ultra-violet ray filter is necessary for outdoor operation.

(b) Avoid condensation of water. It may result in improper operation or disconnection of electrode.

(c) Do not exceed the absolute maximum rating value. (the supply voltage variation, input voltage variation, variation in part contents and environmental temperature, so on) Otherwise the module may be damaged.

(d) If the module displays the same pattern continuously for a long period of time,it can be the situation when the image "sticks" to the screen.

(e) This module has its circuitry PCB's on the rear side and should be handled carefully in order not to be stressed.

www.panelook.com

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

11. EDID

Approval

Address (HEX)	FUNCTION	Value HEX	BIN	DEC	ASCII or Data	Notes
00	Header	00	00000000	0		EDID Header
01		FF	11111111	255		
02		FF	11111111	255		
03		FF	11111111	255		
04		FF	11111111	255		
05		FF	11111111	255		
06		FF	11111111	255		
07		00	00000000	0		
08	ID Manufacturer Name	4C	01001100	76	S	3 character ID
					E	
09		A3	10100011	163	C	"SEC"
0A	ID Product Code	44	01000100	68	[D]	
0B		52	01010010	82	[R]	
0C	32-bit serial no.	00	00000000	0		
0D		00	00000000	0		
0E		00	00000000	0		
0F		00	00000000	0		
10	Week of manufacture	00	00000000	0		
11	Year of manufacture	14	00010100	20	2010	2010
12	EDID Structure Ver.	01	00000001	1	1	EDID Ver. 1.0
13	EDID revision #	03	00000011	3	3	EDID Rev. 3
14	Video input definition	80	10000000	128		
15	Max H image size	24	00100100	36	36	36 cm (approx)
16	Max V image size	15	00010101	21	21	21 cm (approx)
17	Display Gamma	78	01111000	120	2.2	Gamma 2.2
18	Feature support	0A	00001010	10		
19	Red/green low bits	85	10000101	133		10000111
1A	Blue/white low bits	95	10010101	149		11111110
1B	Red x/ high bits	99	10011001	153	0.600	Red x 0.600= 10011001
1C	Red y	57	01010111	87	0.340	Red y 0.340= 01010111
1D	Green x	4F	01001111	79	0.310	Green x 0.310= 01001111
1E	Green y	8F	10001111	143	0.560	Green y 0.560= 10001111
1F	Blue x	26	00100110	38	0.150	Blue x 0.150= 00100110
20	Blue y	21	00100001	33	0.130	Blue y 0.130= 00100001
21	White x	50	01010000	80	0.313	White x 0.313= 01010000
22	White y	54	01010100	84	0.329	White y 0.329= 01010100
23	Established timing 1	00	00000000	0		
24	Established timing 2	00	00000000	0		
25	Established timing 3	00	00000000	0		

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

Approval

26	Standard timing #1	01	00000001	1		not used
27		01	00000001	1		
28	Standard timing #2	01	00000001	1		not used
29		01	00000001	1		
2A	Standard timing #3	01	00000001	1		not used
2B		01	00000001	1		
2C	Standard timing #4	01	00000001	1		not used
2D		01	00000001	1		
2E	Standard timing #5	01	00000001	1		not used
2F		01	00000001	1		
30	Standard timing #6	01	00000001	1		not used
31		01	00000001	1		
32	Standard timing #7	01	00000001	1		not used
33		01	00000001	1		
34	Standard timing #8	01	00000001	1		not used
35		01	00000001	1		
36	Detailed timing/monitor descriptor #1	1C	00011100	28	107.8	Main clock = 107.8(53.9*2 MHz)
37		2A	00101010	42		
38		40	01000000	64	1600	Hor active=1600 pixels
39		4C	01001100	76	332	Hor blanking=114 pixels
3A		61	01100001	97		4bit : 4bit
3B		84	10000100	132	900	Vertcal active=900 lines
3C		1E	00011110	30	30	Vertical blanking=12 lines
3D		30	00110000	48		4bit : 4bit
3E		30	00110000	48	48	H sync. Offset=48 pixels
3F		20	00100000	32	32	H sync. Width=32 pixels
40		25	00100101	37	2 5	V sync. Offset=2 lines V sync. Width=5 lines
41		00	00000000	0		2bit : 2bit :2bit :2bit
42		68	01101000	104	360	H image size= 360 mm(approx)
43		D2	11010010	210	210	V image size = 210 mm(approx)
44		10	00010000	16		
45		00	00000000	0		No Horizontal Border
46		00	00000000	0		No Vertical Border
47		19	00011001	25		
48	Detailed timing/monitor descriptor #2	00	00000000	0		Manufacturer Specified (Timing)
49		00	00000000	0		
4A		00	00000000	0		
4B		0F	00001111	15		
4C		00	00000000	0		
4D		00	00000000	0		**Value**=HSPWmin / 2
4E		00	00000000	0		**Value**=HSPWmax / 2
4F		00	00000000	0		**Value**=Thbpmin /2
50		00	00000000	0		**Value**=Thbpmax /2
51		00	00000000	0		**Value**=VSPWmin /2
52		00	00000000	0		**Value**=VSPWmax /2
53		00	00000000	0		**Value**=Tvbpmin / 2
54		00	00000000	0		**Value**=Tvbpmax / 2
55		2E	00101110	46		Thpmin=**value***2 + HA pixelclks
56		FA	11111010	250		Thpmax=**value***2 + HA pixelclks
57		06	00000110	6		Tvpmin=**value***2 + VA lines
58		78	01111000	120		Tvpmax=**value***2 + VA lines
59		00	00000000	0		Module revision

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com

Approval

5A		00	00000000	0		ASCII Data String Tag
5B		00	00000000	0		
5C		00	00000000	0		
5D		FE	11111110	254		
5E		00	00000000	0		
5F		53	01010011	83	[S]	
60		41	01000001	65	[A]	
61	Detailed timing/monitor	4D	01001101	77	[M]	
62	descriptor #3	53	01010011	83	[S]	
63		55	01010101	85	[U]	
64		4E	01001110	78	[N]	
65		47	01000111	71	[G]	
66		0A	00001010	10	[^]	
67		20	00100000	32	[ ]	
68		20	00100000	32	[ ]	
69		20	00100000	32	[ ]	
6A		20	00100000	32	[ ]	
6B		20	00100000	32	[ ]	
6C		00	00000000	0		Monitor Name Tag (ASCII)
6D		00	00000000	0		
6E		00	00000000	0		
6F		FE	11111110	254		
70		00	00000000	0		
71		31	00110001	49	[1]	
72		35	00110101	53	[5]	
73	Detailed timing/monitor	36	00110110	54	[6]	
74	descriptor #4	4B	01001011	75	[K]	
75		54	01010100	84	[T]	
76		30	00110000	48	[0]	
77		32	00110010	50	[2]	
78		2D	00101101	45	[-]	
79		33	00110011	51	[3]	
7A		30	00110000	48	[0]	
7B		31	00110001	49	[1]	
7C		0A	00001010	10	[^]	
7D		20	00100000	32	[ ]	
7E	Extension Flag	00	00000000	0		
7F	Checksum	**6D**	01101101	109		

www.panelook.com

Samsung Secret

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com